


# Isolated syrup calibration tank



- Isolated tank
- Integrated mixer
- Integrated washing system
- Trolley on wheels
- Real-time brix reader
- Circulation pump
- 2 available modes

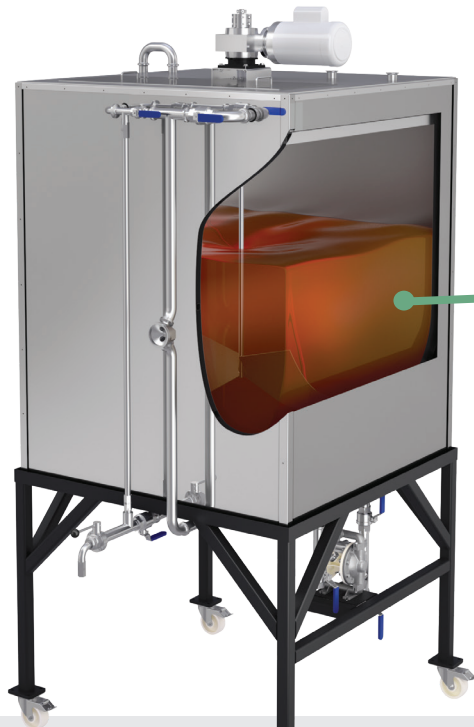

250 GAL.	6793443	4' X 4' X 3'
350 GAL.	6793445	4' X 4' X 4.5'
Isolated calibration tank starter control case		6793001

## TANK LEVEL CONTROL



5' level control for CDL tanks 73500	\$336.75
6' level control for CDL tanks 73500-6	\$341.85

### ADVANTAGES

- The CDL tank level controls are made entirely of stainless steel.
- In addition, you can very quickly and easily adjust the desired sap level where the pump will start.
- The solidity of CDL controls prevent breakage caused by ice.

Perfect syrup calibration at a controlled temperature!



## Real-time Brix reader

0 to 80 Brix!

Homogenize syrup before filling barrels!

Automatic temperature compensation for accurate reading.

Can read between 5°C and 100°C (41°F-212°F)

24-volt power supply. Requires a circulation pump  
May be installed on piping.

## PLUGS



FOR TANKS			
1½"	5' rod	678112	\$90.30
2"	5' rod	678123	\$91.65
3"	3' rod	67BOUCH37	\$109.20

## ADAPTORS



FOR PLASTIC TANKS		
½"	RA5012	\$14.05
¾"	RA5032P	\$17.80
1"	RA5034P	\$20.90
1¼"	RA5036P	\$23.50
1½"	RA50309P	\$26.25
2"	RA5042P	\$28.10
3"	RA5454P	\$39.40



FOR STAINLESS STEEL TANKS		
1¼"	668673	\$102.05
1½"	66867	\$107.15
2"	668672	\$112.35

## UNIVERSAL MIXER AND STAINLESS STEEL SUPPORT



Universal mixer for 4', 5', 6' and 7' wide tank

6792034

Adjustable stainless steel support  
1/2HP Motor at 30 RPM,  
115 Volts with 10' of electric cord.

Note: a cut in length may be required to adjust the height. Prices are available upon request.